ADDENDUM 1

ADDENDUM DESCRIPTION: 470 270000261 Washington Unified School District Instruction to Service Providers and Low Voltage Upgrade-Rate Cabling 2027-28 Job Walk Clarifications and Notes

---

INSTRUCTION TO SERVICE PROVIDERS CLARIFICATIONS

Pg 1 E-RATE CABLING PROJECT — FUNDING YEAR [FY20XX]

Clarification: should be E-RATE CABLING PROJECT — FUNDING YEAR 2027

References to copper within document

Clarification: Please disregard any references to copper. This project does not include new copper horizontal cabling, outlets, or cabling for bells, clocks, or cameras.

References to Manufacturer within the document

Clarification: Panduit or equivalent as the basis of design for all new or replaced items.

Page 2 Section 3

Clarification highlighted in red

The service provider shall furnish all labor, supervision, materials, equipment, tools, testing, transportation, permits, incidental work, and other resources necessary for a complete and operational installation, except where expressly identified as District-furnished.

Detailed quantities and site-specific requirements are provided in the project plans, specifications, drawings, walkthrough materials, and/or appendices issued with this solicitation. Service providers shall inspect all available documents and verify field conditions before submitting a bid.

- Category 6/6A horizontal copper cabling, outlets, faceplates, jacks, patch panels, and associated hardware.
- Fiber optic backbone cabling, termination, enclosures, splice work, and associated hardware.
- MDF/IDF rack or cabinet installation, cable management, grounding/bonding where applicable, and patching.
- Pathways, supports, sleeves, J-hooks, conduit, raceway, bushings, fittings, firestopping, and other components necessary for a complete installation.
- Removal of abandoned cabling or equipment only when specifically included in the scope.
- Labeling, testing, test reports, as-built documentation, and closeout materials.
- Coordination with District technology staff, site administrators, other service providers, and the District's project manager.
- The service provider shall not perform additional work, substitute materials, relocate equipment, or change the approved design without written authorization from the District. Oral direction from site personnel does not
- constitute authorization for a change in contract price or scope.

Page 3 Section 6
Clarification: Form 470 #270000261
Clarification: Submit Proposal via E-mail to: erate@wusd.ws AND erate@adtechgroup.com

Page 5 Section 8 and Page 10 Section 25
Clarification: As this project is subject to California public works bidding requirements, the District will award the contract to the lowest responsible bidder submitting a responsive bid, or reject all bids, in accordance with California Public Contract Code Section 20111(b).
Section 8 — Bid Evaluation
The weighted evaluation matrix in Section 8 will not be used to determine the successful bidder. Bids will be reviewed for responsiveness to the solicitation requirements and bidder responsibility, including licensing, qualifications, experience, technical compliance, and ability to perform the work.
The District will also document compliance with applicable E-Rate competitive bidding requirements.

Section 25 — Right to Accept, Reject, or Award in Part
The award provisions of Section 25 shall be interpreted in accordance with California Public Contract Code Section 20111(b). The District will not use weighted scoring or negotiations to select a higher-priced bidder over the lowest responsible bidder submitting a responsive bid.

Section 17
Clarification highlighted in red
All fiber cabling shall be tested in accordance with the applicable cabling standard and project specifications. Testing shall be performed after installation is complete and before final acceptance.

- Provide test results for every installed cable run, identified by the District's labeling scheme.
- Fiber test reports shall include appropriate loss/continuity testing data for the installed fiber type and application.
- Failed links shall be repaired and retested at no additional cost to the District.
- Provide electronic test reports in a searchable, organized format.
- Final acceptance is contingent upon satisfactory testing, labeling, cleanup, punch-list completion, and delivery of
- closeout documents.

LOW VOLTAGE UPGRADEE-RATE CABLING 2027-28 CLARIFICATIONS
References to copper within document
Clarification: Please disregard any references to copper. This project does not include new copper horizontal cabling, outlets, or cabling for bells, clocks, or cameras.

References to Manufacturer within the document
Clarification: Panduit or equivalent as the basis of design for all new or replaced items.

Page 11 Section 5b
Clarification: LC compatible field installable single mode and/or multimode connectors.

Page 17 Section 1c

Clarification highlighted in red

The Service Provider shall provide all materials labor, tools, and services to install and test the complete network wiring as shown on the school maps, noted during the walkthrough, and specified in this RFP. Installation and testing shall be performed in the presence of the Washington Unified School District's project manager (or designee). All work shall comply with the latest adopted National Electrical Code (NEC), Articles 300 and 800, and Title 24 of the California Code of Regulations and all other laws, codes, and regulations. All floor and wall penetrations shall be properly fire stopped in accordance with applicable code requirements.

Page 19 Section 9g

Plywood is assessed as each cabinet is installed and replaced only where needed. The district supplies it, and the vendor installs it.

Section 5b Page 25

Clarification highlighted in red

Fiber Optics Connectors:

i. All connectors shall be glass-in-ceramic SC compatible field installable single mode and/or multimode connectors.

Page 25 Section 5e

Clarification highlighted in red

If fiber is supplied to Service Provider by the District, it shall be tested before installation, while still on the shipping reel, using an optical loss test set (OLTS).

Page 34 9j

Remove and reinstall the existing 120V boxes and plugs in the new cabinets, reusing the parts. The District supplied replacements if anything breaks.

Page 37 Section 12c

Two copies of all test results, and drawings for all identifications shall be provided to the District before the final review. All required test results must be received and approved by the District prior to final payment.

Page 37 Section 12d

The District or District's representative will review the installation and testing data prior to the system acceptance.

Page 37 Section 12e

The District or District's representative may test some of the system's features to ensure that the testing data is correct. If a substantial discrepancy is found, the District reserves the right to have an independent consultant perform a certification of the entire system. If such a procedure is undertaken, the cost of the testing will be billed back to the Service Provider.

Bid Form
Address correction: Please use corrected bid form attached to this amendment.

District Project Clarifications:

Counts vs. maps: The map legends do not match our scope counts. The American Union's legend says 9 IDF cabinets because it counts the Main Office cabinet, which is not being replaced, so the scope says 8. The WFES and WFMS legends also differ from the scope. The District is not changing the maps. The District added a line to the scope saying the scope counts control, so please keep that line in.

Green paths on maps: The green "New Fiber Path" lines mean new fiber in existing conduit. No new conduit is needed anywhere, including the Washington Union stadium pathway. B2 (the bus barn) is excluded from the bid but is still drawn in green on the WFES map, so please remove or label it.

West Fresno Middle School counts: WFMS is now 10 fiber runs and 9 cabinets. The cafeteria cabinet (brand new) and the MDF cabinet are excluded. The fiber to the cafeteria is still included, single mode only, with no new cabinet. Punch-down locations at WFMS will be case by case, so use 11 as the maximum.

Phone blocks: The old phone blocks in the IDFs are all unused. Please add that they are removed and discarded, which is an exception to the reuse of existing termination blocks.

Photo #1: IDF behind the south gym

Photo #2: IDF at the stadium

L6 at Easton High: This is a cabinet only, with no new fiber. It is **not** one of the 22 Washington Union runs.

Job Walk Service Provider Questions and Answers:

Q1. West Fresno Elementary IDF: Where does all the fiber run to, and where is the hatch?
A1. The fiber runs straight to the MDF, through the wall behind the cabinet. The hatch is in the closet next to the IDF cabinet, behind it.

Q2. Do all the cabinets need new plywood backing?
A2. No. Plywood will be assessed as each cabinet is installed and replaced only where needed. The District will supply any plywood that is needed, and the Service Provider will install it when mounting the cabinet so there is no delay. Service providers do not need to include plywood material in their bid but should include installation labor.

Q3. What are the allowed work hours?
A3. Work may be done during the summer or split between winter break and after hours if needed. After-hours work can begin at 3:15 PM on school days and continue as late as needed.

Q4. Are the fiber paths at all sites already in place, with no new conduit needed?
A4. Yes. Existing conduits and pathways will be used at all four sites, including the Washington Union stadium

pathway. New conduit is not part of this scope.

Q5. Is B2, the new line to the bus barn at West Fresno Elementary, included in the bid?
A5. No. B2 is excluded from the bid. The District will not run this cable at this time.

Q6. What should be done with the 120V boxes and plugs in the cabinets?
A6. The service provider will remove the existing 120V boxes and plugs from the cabinets and reinstall them in the new cabinets, reusing the existing parts. If a plug or box breaks, the District will supply the replacement. Service providers do not need to include new electrical parts in their bid.

Q7. What is required for the punch downs?
A7. Punch down all existing cables that are not terminated in punch down blocks. Certification is not required, but test each punched-down cable to confirm it is terminated correctly. Reuse the existing patch panels. If a patch panel is broken or replacement parts cannot be found, replace it with a Panduit panel (or equivalent). The District will supply the replacement panels, and the Service Provider will install them. The service provider must give the district a count of panels needing replacement before work starts at each site so the district can order them right away. If the district's panels arrive late, the service provider will supply them, so work is not delayed.

Q8. Should the cables at the top of the IDF cabinets be covered with sleeves?
A8. Yes. All cables entering the top of the IDF cabinets must be covered with a sleeve. The service provider may choose the sleeve type, as long as it is approved for the application and protects the cable.

Q9. What should be done with the old phone blocks in the IDFs?
A9. The old phone blocks (believed to be 110 blocks) are all unused. Remove and discard them. They and their cables do not need to be reinstalled in the new cabinets.

Q10. Are the Christy boxes clear of dirt?
A10. Christy boxes at American Union may have dirt in them. Most other boxes the District is aware of should be clear of dirt. The service provider will clear any dirt from the boxes needed for this project and must include that work in the bid. Service providers should inspect the boxes at the job walk.

Q11. Are the cafeteria and MDF cabinets at West Fresno Middle School included?
A11. No. The cafeteria cabinet and the MDF cabinet at West Fresno Middle School are excluded from the bid. The cafeteria cabinet is brand new. The fiber is still included: install single-mode fiber to the cafeteria, with no new cabinet. WFMS has 10 fiber runs and 9 cabinets.

Q12. Where can the bid documents be found?
A12. Initial job walk packet, sign in sheets and job walk clarifications and notes will be distributed to all job walk participants via email and posted to the USAC EPC portal. Any future addendums will only be posted to the USAC EPC portal.

Q13. Do vendors take down the Johnson Controls boxes?
A13. No. The Johnson Controls boxes stay where they are. The service provider disconnects the cables from each box (mostly Cat5/6 and possibly a 3-wire power cable) and then reconnects them after the new cabinet is

installed. Label each cable before disconnecting it. The service provider coordinates this work through the district.

Q14. Is a new cabinet included at the American Union Main Office?
A14. No. There is no cabinet replacement at the American Union Main Office (the MDF). The cabinets are replaced at the 8 run locations only.

Q15. Which locations and items are excluded from the bid?
A15. West Fresno Elementary: B2, the new line to the bus barn. West Fresno Middle School: the cabinets at the cafeteria and the MDF (the single-mode fiber to the cafeteria is still included). American Union: the cabinet at the Main Office (MDF).

Q16. Is asbestos documentation available?
A16. The District does not have asbestos documentation available at this time and will continue to look for it. If it is found, it will be provided to all prospective service providers in the same way as the other bid documents. To the District's knowledge, all of the buildings where work will take place have been renovated, and no asbestos has been found. Service Providers must follow Instructions section 19. If suspected asbestos-containing material is encountered, stop work in the affected area and notify the District immediately.

Q17. Does the cable bid include cabinet replacement?
A17. Yes. Cabinet replacement is included in the bid. See the Cabling Scope of Work (Section 15) for the cabinet requirements at each site and the exclusions in A15.

Q18. Does the L6 building at Easton High need new fiber?
A18. No. The L6 building at Easton High gets a new cabinet only. No new fiber is needed there.

Q19. Can the bid be submitted by school?
A19. Yes. Provide pricing by school (site), with E-Rate ineligible costs, such as the Washington Union stadium pathway, shown separately.

Q20. Do the patch panels need to be replaced?
A20. Only if needed (broken, or parts cannot be found). The district will supply the replacement panels, and the service provider will install them. If the district cannot get the panels in a timely manner, the service provider will supply them. The service provider must give the district a count of panels needing replacement before work starts at each site. See A7.

Q21. What are the best times and hours to install?
A21. Work can be done during the summer or after school hours if needed (starting at 3:15 PM on school days) and during winter break. The service provider can schedule the work for whatever time works best for them, subject to district approval of the project schedule. See A3.

BID FORM

TO: WASHINGTON UNIFIED SCHOOL DISTRICT, acting by and through its Governing Board, herein called the "DISTRICT":

1. Pursuant to your Notice to Contractors Calling for Bids and the other documents relating thereto, the undersigned bidder, having become familiarized with the terms of the complete contract, as defined in the Agreement, the local conditions affecting the performance of the contract and the cost of the work at the place where the work is to be done, hereby proposes and agrees to be bound by all the terms and conditions of the complete contract and agrees to perform, within the time stipulated, the contract, including all of its component parts, and everything required to be performed, and to provide and furnish any and all of the labor, materials, tools, expendable equipment, and all applicable taxes, utility and transportation services necessary to perform the contract and complete in a good workmanlike manner all of the work required, including sheeting, shoring and bracing, or equivalent method for protection of life and limb in trenches and open excavation in conformance with applicable safety orders, in connection with the following:

Project: _____

Located at: _____

all in strict conformity with the complete contract as defined in the Agreement, prepared therefore and now on file at the office of: Washington Unified School District, 7950 S Elm Ave, Fresno, CA 93706 for the sum of:

Total Bid before Allowances: $_____

Allowance: $ _____

Total Base Bid (including Allowance(s)): $_____

Total:

_____ DOLLARS

Base bid to include all Work indicated in drawings and narratives.

Provide price to add/deduct the following work.
Alternates:
None.

The undersigned hereby acknowledges receipt of, and is familiar with the contents of, the following Addenda, and the undersigned warrants that all costs therefore are included in this proposal:

Addendum No. _____ dated _____

Addendum No. _____ dated _____

Addendum No. _____ dated _____

Addendum No. _____ dated _____

1. Each individual bid term shall be determined from visiting the work site, reviewing the plans and specifications, and all other portions of the contract documents, and shall include all items necessary to complete the work, including the assumption of all obligations, duties, and responsibilities necessary for the successful completion of the contract and the furnishing of all materials and equipment required to be incorporated in and form a permanent part of the work: tools, equipment, supplies, transportation, facilities, labor, superintendence, and services required to perform and complete the work; and bonds, insurance as required by the Contract and submittals; all as per the requirements of the contract documents, whether or not expressly listed or designated.

2. It is understood that the DISTRICT reserves the right to reject this bid and that this bid shall remain open and not be withdrawn for the period specified in the Notice to Contractors Calling for Bids.

3. The required list(s) of proposed subcontractors is attached hereto, and the undersigned represents and warrants that such list(s) is complete and in compliance with the Subletting and Subcontracting Fair Practices Act.

4. The required Non-Collusion Declaration is hereto attached.

5. The required bid security is hereto attached.

6. The required Contractors Certificate Regarding Workers' Compensation is hereto attached.

7. The Information Required of Bidder is attached hereto.

8. It is understood and agreed that if written notice of the acceptance of this bid is mailed, telegraphed, or delivered to the undersigned after the opening of the bid, and within the time this bid is required to remain open, or at any time thereafter before this bid is withdrawn, the undersigned will execute and deliver to the DISTRICT a contract in the form attached hereto in accordance with the bid as accepted, and that the undersigned will also furnish and deliver to the DISTRICT the Performance Bond and Payment Bond as specified, all within the five (5) calendar days after receipt of notification of award, and that the work under the contract shall be commenced by the undersigned bidder, if awarded the contract on the date to be stated in the DISTRICT'S Notice to Proceed delivered to the Contractor, and shall be completed by the Contractor in the time specified in the contract documents.

9. Communications conveying acceptance of bids, requests for additional information or other correspondence should be addressed to the undersigned at the address stated below.

_____

_____

10. The name of all persons interested in the foregoing proposal as principals are as follows:

_____

_____

_____

(IMPORTANT NOTICE: If bidder or other interested person is a corporation, state legal name of corporation, also names of the president, secretary, treasurer, and manager thereof; if a partnership, state true name of firm, also names of all individual partners composing firm; if bidder or other interested person is an individual, state first and last name in full.)

11. In submitting this bid, the bidder offers and agrees that if the bid is accepted, it will assign to DISTRICT all rights, title and interest in and to all causes of action it may have under Section 4 of the Clayton Act (15 U.S.C. Section 15) or under the Cartwright Act (Business & Professions Code Section 16700 et seq.) arising from the purchase of goods, materials, or services by the bidder for sale to the DISTRICT pursuant to the bid. Such assignment shall be made and become effective at the time the DISTRICT tenders final payment.

12. If the bidder is a corporation, the undersigned hereby represents and warrants that the corporation is duly incorporated and is in good standing in the State of California and that _____whose title is_____, is authorized to act for and bind the corporation.

13. It is understood and agreed that, should bidder fail or refuse to return executed copies of the Agreement, Contractor's Certificate, Certification of Insurance as required, and required bonds to the DISTRICT within five (5) days of actual notice of the award of the contract to bidder, the security may be forfeited to the DISTRICT as liquidated damages.

14. The undersigned hereby warrants that the bidder has an appropriate license, in accordance with the act providing for the licensing of contractors, License No. _____, Class _____; that such license entitles the bidder to provide the work; that such license will be in full force and effect throughout the duration of performance under this contract; and that any and all subcontractors to be employed will have appropriate licenses. The undersigned hereby warrants that the bidder is registered with the DIR, Registration No. _____, and proof of registration is submitted with this bid.

15. In submitting this bid, the bidder agrees that if its bid is accepted, it shall perform the following work, exclusive of supervisory and clerical work, without the services of any subcontractor which shall constitute at least 15% of the total work under the contract:

_____

_____

_____

_____

16. The bidder hereby certifies that it is, and at all times during the performance of work hereunder shall be, in full compliance with the provisions of the Immigration Reform and Control Act of 1986 ("IRCA") in the hiring of its employees, and the bidder shall indemnify, hold harmless and defend the DISTRICT against any and all actions, proceedings, penalties or claims arising out of the bidder's failure to comply strictly with the IRCA.

17. It is understood and agreed that the CONTRACTOR, as well as all subcontractors will adhere to and comply with all statutes and regulations pertaining to monitoring and enforcement of prevailing wage requirements by the Department of Industrial Relations.

18. It is understood and agreed that if, requested by the DISTRICT, the bidder shall furnish a notarized financial statement, references, and other information sufficiently comprehensive, to permit an appraisal of its current financial condition.

The undersigned hereby declares that all of the representations of this bid are made under penalty of perjury under the laws of the State of California.

Individual Contractor

Name: _____
Signed by: _____
Business Address: _____
_____
Date: _____

****

Partnership

Name _____
Signed by: _____,Partner
Business Address: _____
_____
Date: _____
Other Partners: _____

****

Corporation

Name:_____
(a _____ Corporation[1])
Business Address:_____
_____
Signed by: _____President, Dated:_____
Signed by: _____Secretary, Dated:_____

[Seal and Attest]

Business Address: _____
_____

A corporation receiving the award shall furnish evidence of its corporate existence and evidence that the officer signing the Agreement and Bonds is duly authorized to do so.

****

Joint Venture

Name: _____
Signed by: _____Joint Venture
Business Address: _____
_____
Date: _____


****

Other Parties to Joint Venture:


If an individual: _____
(Signed)
Doing Business as: _____
If a Partnership: _____
Signed by: _____, Partner
If a Corporation: _____
(a _____Corporation)
By: _____Date: _____
Title:_____ Seal and Attest)

****

IDF behind the South Gym

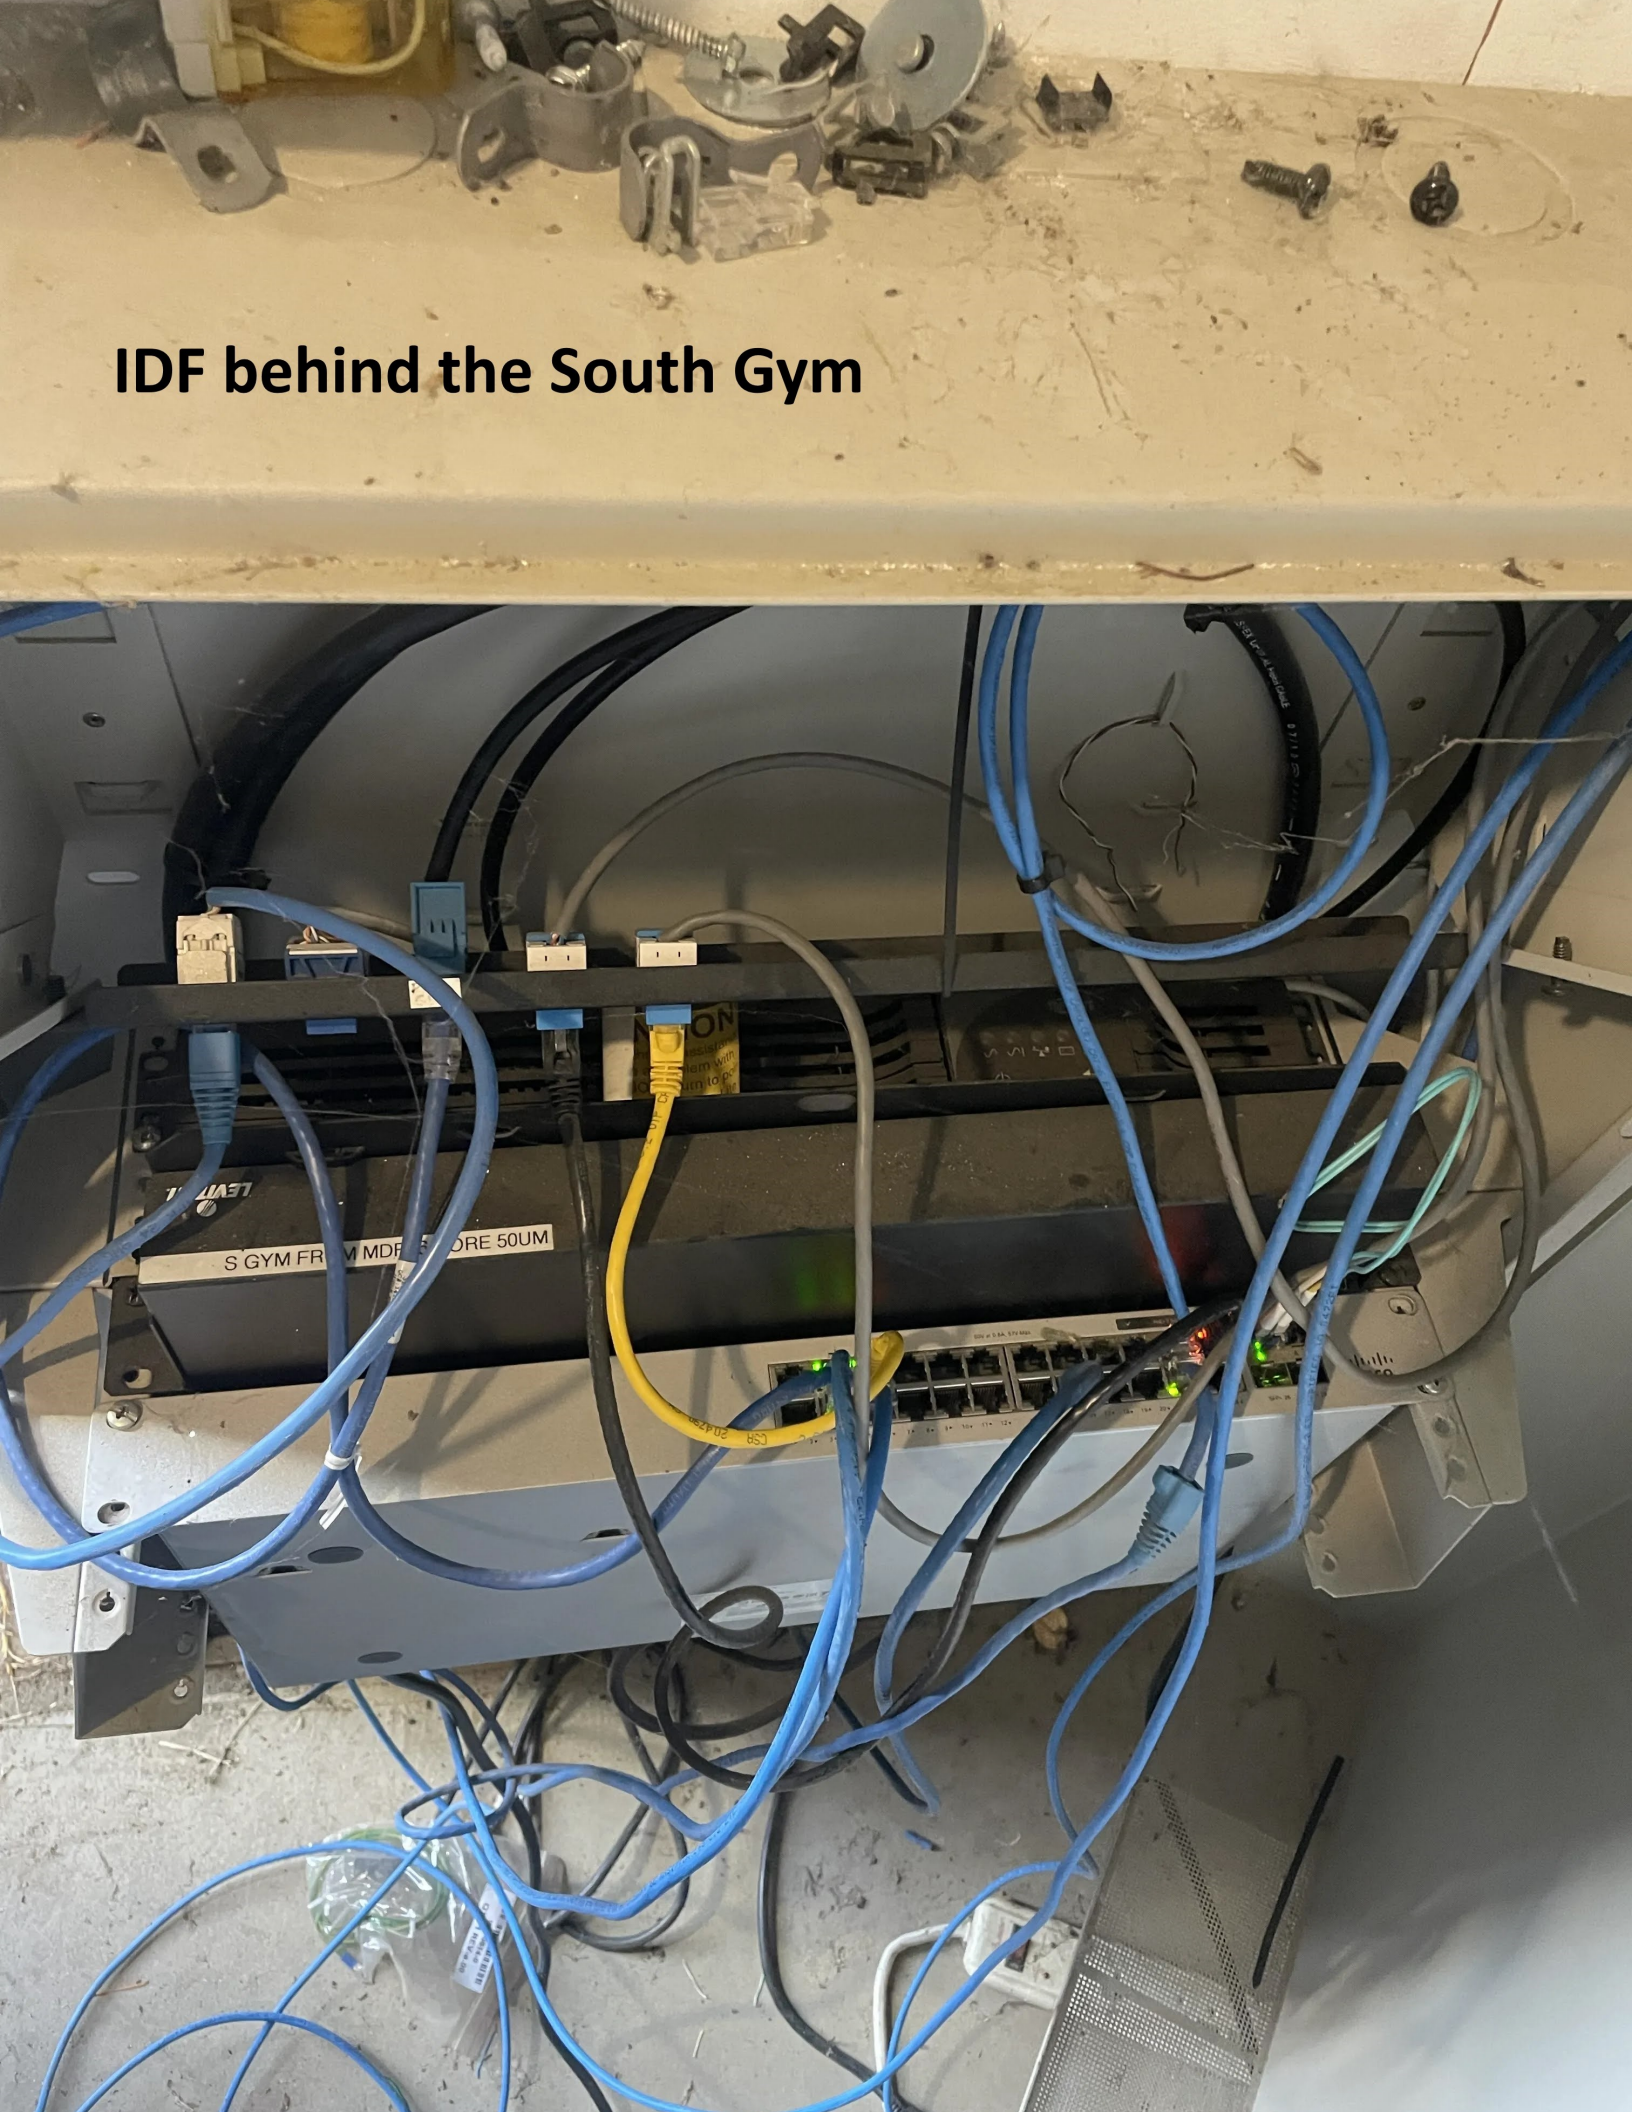

Stadium

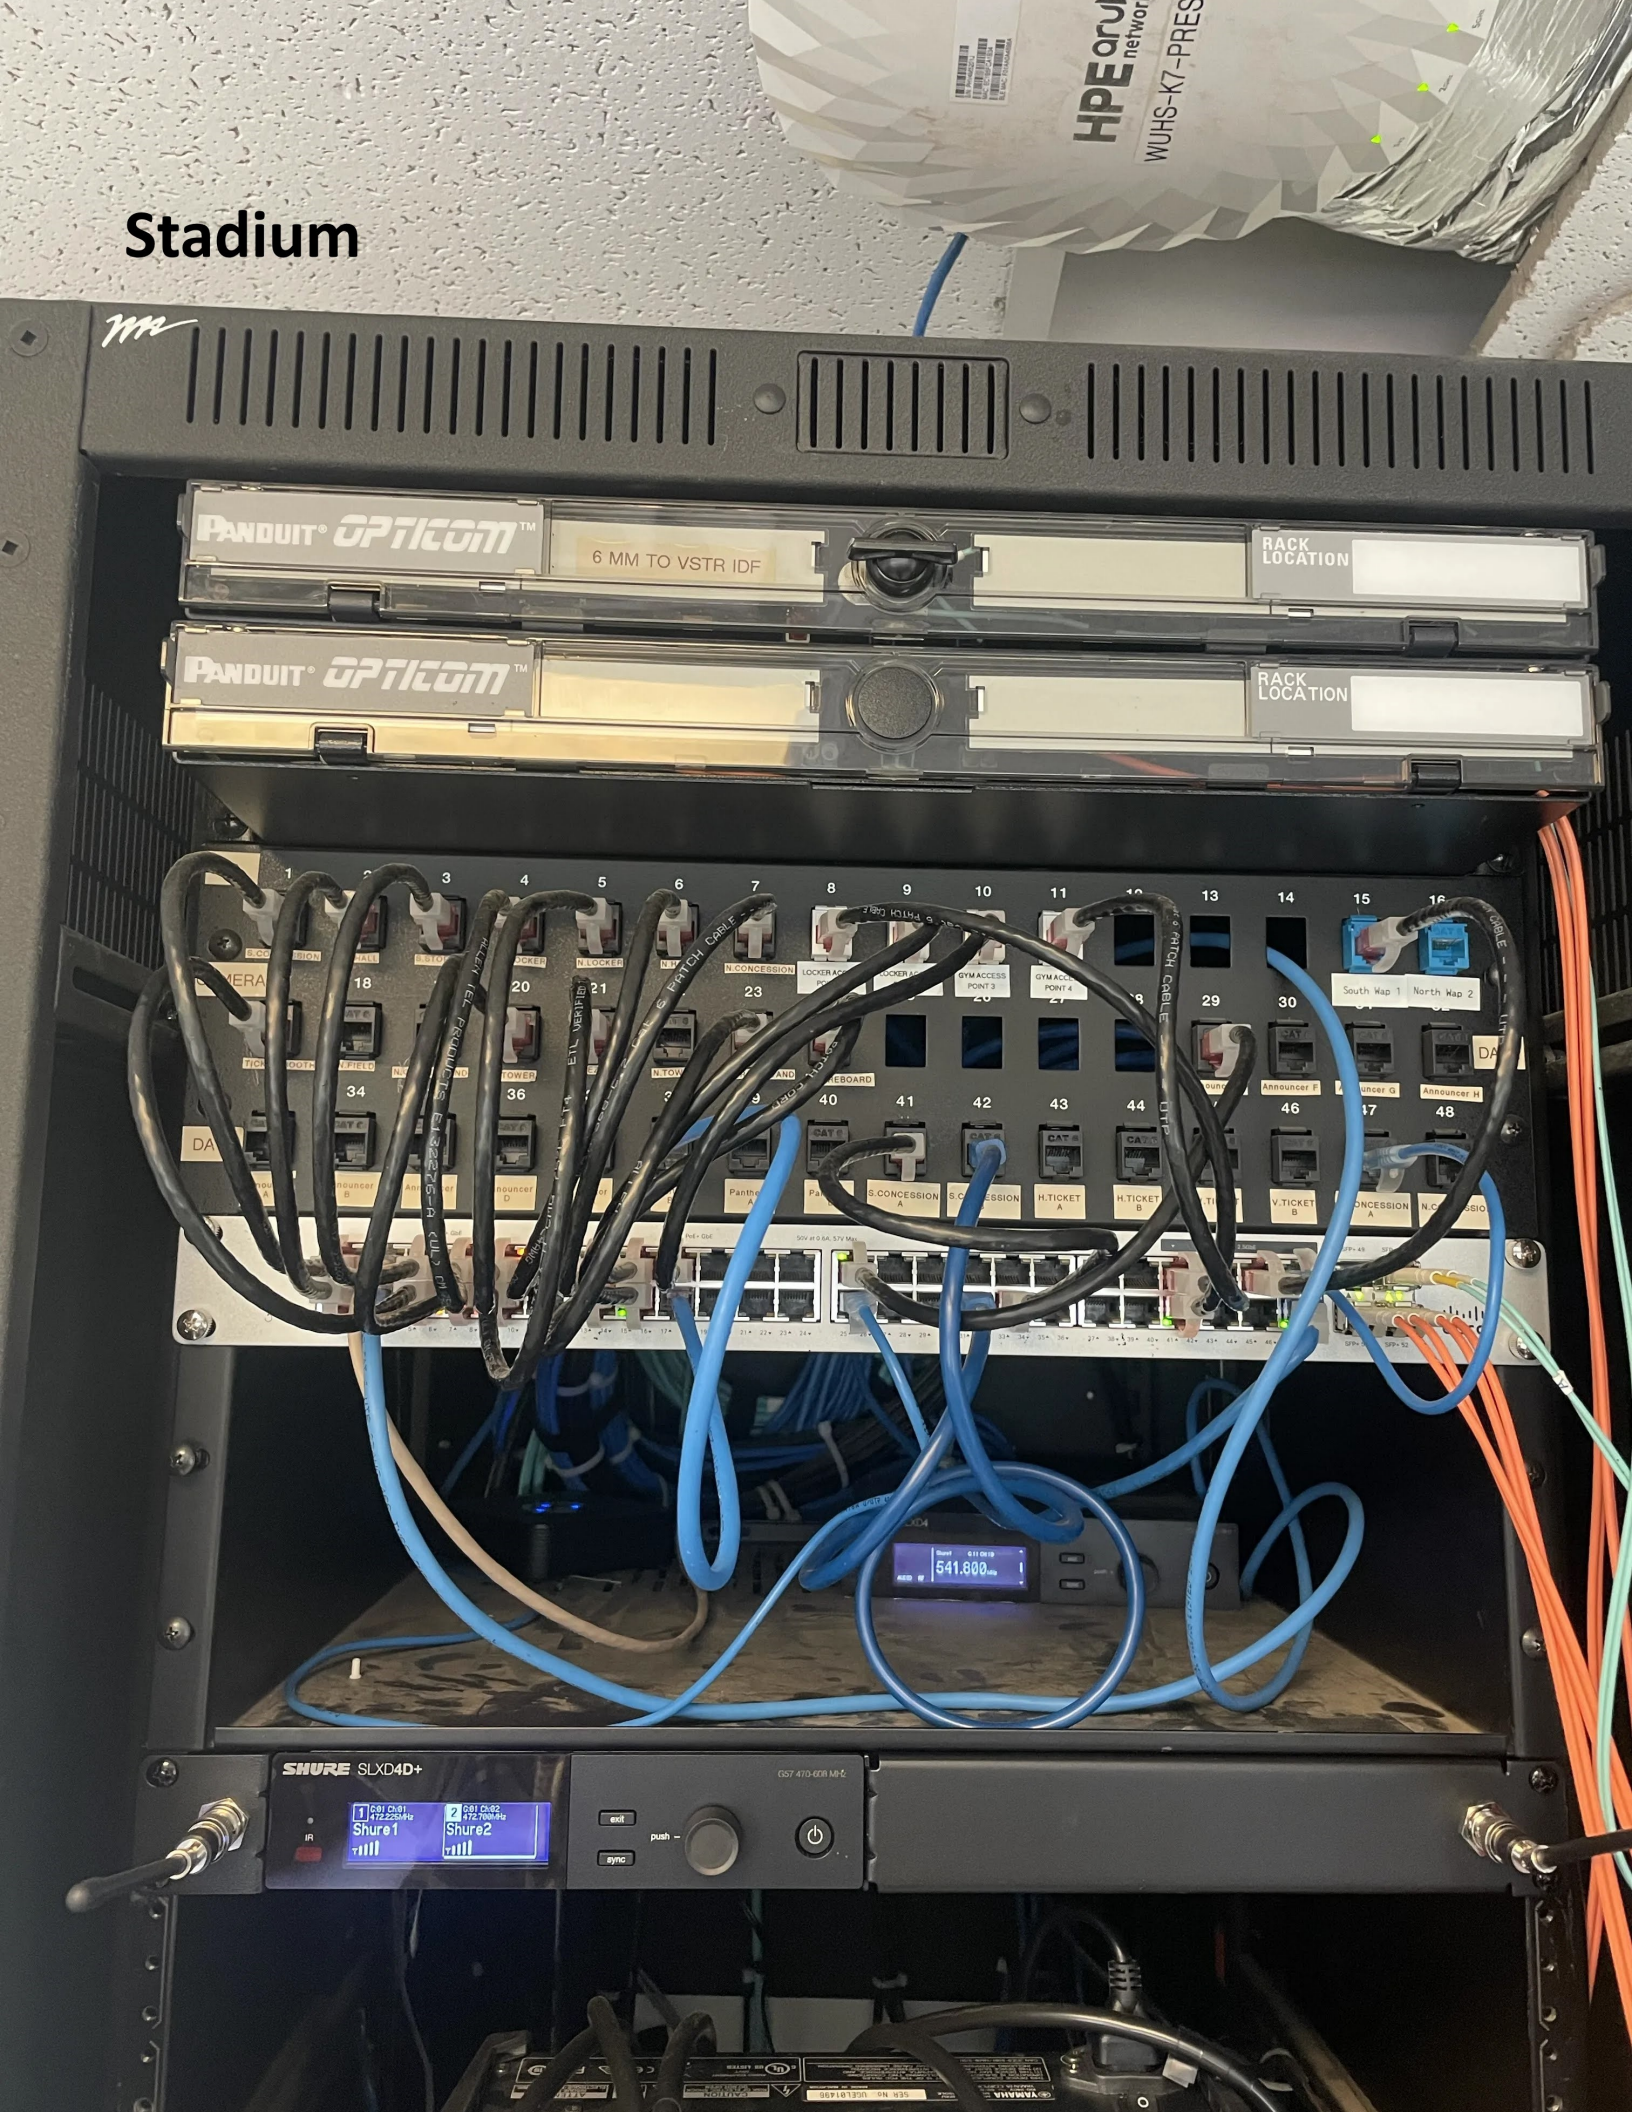
PANDUIT OPTICOM
6 MM TO VSTR IDF
RACK LOCATION
PANDUIT OPTICOM
RACK LOCATION
South Wap 1
North Wap 2
SHURE SLXD4D+
Shure1
Shure2
exit
sync
push –

All other bidding/contract, stipulations, dates and times remain unchanged, in full effect and by reference become a part of this addendum.